

# Shila - chair technical specification



**.mdd**

**.mdd has a leading position among manufacturers of office furniture with many awards that prove quality and continuously increase demand for it's products.**

The realities of today`s market require constant quality improvement at all levels of modern organization. This applies in particular to customer service, marketing, quality of products and also to quality of processes within the company.

Partnership relations among employees and with business partners form a base of economic growth and success of the company.

Constant investments in innovative machinery park, optimization of management systems and an expansion of production halls allow to minimize the lead times for the product of the highest quality.

**More than twenty years of experience in office furniture industry come with reference from a long list of companies and institutions to show their appreciation for an efficient and comprehensive service.**

**.mdd is higly aware of the environment.**

Being located in the forest region with lake by itis side, .mdd takes the nature seriously and invests constantly in a modern and energy-efficient solutions to preserve the local life. Company puts emphasis on waste segregation and recycling. .mdd has been awarded for the exceptional care and involvement in waste disposal. All materials used are environmentally friendly and enjoy a high 95 % rate of being recycled.



## General informations:

### Warranty:

.mdd products - **5 years.**

Electrical components and fabric - **2 years.**

### Certificate - MFC:



### Certificate - fabric:



### Assembly:

the product comes pre-assembled


### Packing:

cardboard

|               |                                   |   |  |
|---------------|-----------------------------------|---|--|
| Shila - chair | Date of preparation<br>16.08.2021 | The data contained in this document is valid in the day of its preparation. Change of the product, as long as it does not affect the basic features of it, does not require consistent updates of the document. | page 2/13<br><b>general informations</b> |
|---------------|-----------------------------------|---|--|

## Technical specification

1. Seat - polyurethane
2. **OPTION WITH EXTRA CHARGE** - seat pad of cut foam, density of 30 kg/m<sup>3</sup>, upholstered

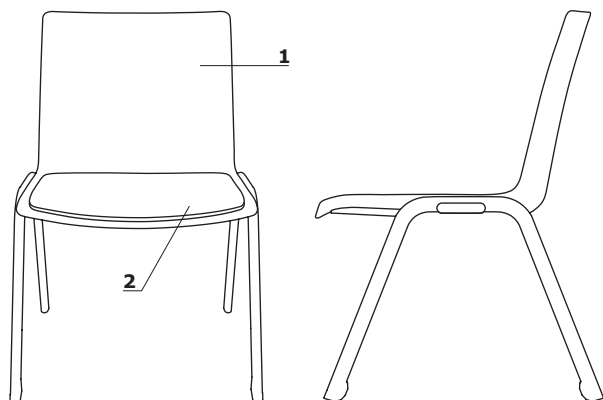

- max. load 120 kg


## Shila - chair



**SHS01**

**Base SHS01:**


- 4 - legged, metal, powder coated
- legs 30 × 18 mm, wall thickness 1,5 mm; CNC - bent
- finished with polypropylene feet (PP+30GF) in frame colour
- side cap, polypropylene, colour: black
- **stacked** - max. 12 pieces



**SHS01K**

**Base SHS01K:**


- 4 - legged, metal, powder coated
- legs 30 × 18 mm, wall thickness 1,5 mm; CNC - bent
- finished with castors Ø55 mm for soft floors;
- OPTION WITH EXTRA CHARGE** - castors for hard floors
- side cap, polypropylene, colour: black



**SHS07**

**Base SHS07:**

- 4 - star, metal, powder coated
- legs 30 × 18 mm, wall thickness 1,5 mm; CNC - bent
- finished with polypropylene feet (PP+30GF), colour: black



**SHS07K**

**Base SHS07K:**

- 4 - star, metal, powder coated
- legs 30 × 18 mm, wall thickness 1,5 mm; CNC - bent
- finished with castors Ø55 mm for soft floors;
- OPTION WITH EXTRA CHARGE** - castors for hard floors

|                             |   |  |   |
|-----------------------------|---|--|---|
| <p><b>Shila - chair</b></p> | <p>Date of preparation<br/>16.08.2021</p> | <p>The data contained in this document is valid in the day of its preparation. Change of the product, as long as it does not affect the basic features of it, does not require consistent updates of the document.</p> | <p>page 3/13<br/><b>technical specification</b></p> |
|-----------------------------|---|--|---|

Shila - chair



SHS10

**Base SHS10:**

- base 5 - star, polypropylene, Ø=680 mm, h=124 mm
- polypropylene feet Ø=50 mm, h=32
- gas spring, steel, colour: black, adjustment range 130 mm (385 - 515 mm)




SHS10K


**Base SHS10K:**

- base 5 - star, polypropylene, Ø=680 mm, h=124 mm
- finished with castors Ø55 mm for soft floors;
- OPTION WITH EXTRA CHARGE - castors for hard floors
- gas spring, steel, colour: black, adjustment range 130 mm (385 - 515 mm)


Optional components



1



2







3


1. **Armrests** - polypropylene (PA+30GF), colour: black
2. **Writing tablet** - plywood varnished, colour: M115 - black semi-matt
3. **Connecting element** - allow for setting chair in a row, polypropylen (PP+15GF), metal, colour: black; only with SHS01 base chairs

**Configuration examples of setting chairs with armrests in a row**

1. Row of 4 chairs - chair with armrests set (right+left) (A) + 3 chairs with left armrests (B)
2. Row of 6 chairs - chair with armrests set (right+left) (A) + 5 chairs with left armrests (B)
3. Row of 4 chairs - chair without armrests set (A) + 3 connecting elements for setting chairs in a row (B)
4. Row of 6 chairs - chair without armrests set (A) + 5 connecting elements for setting chairs in a row (B)

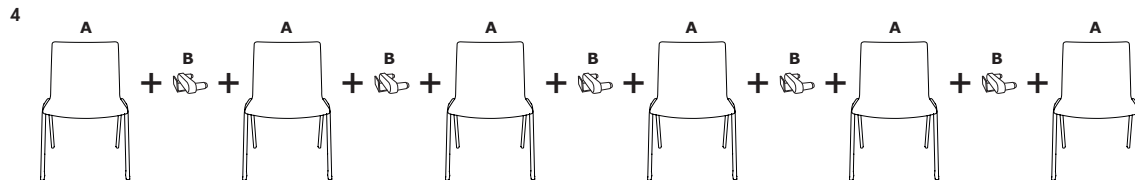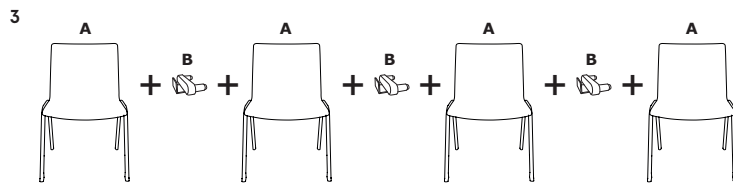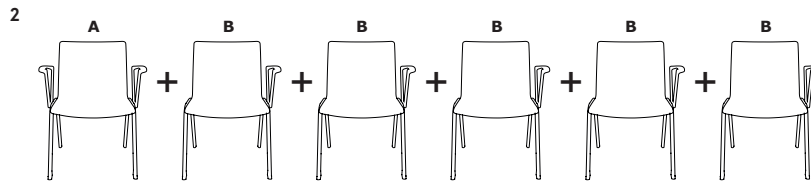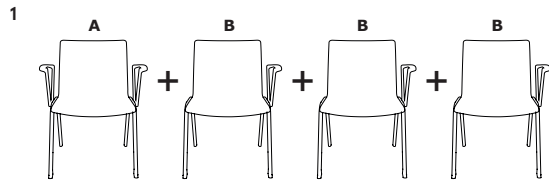

Dimensions

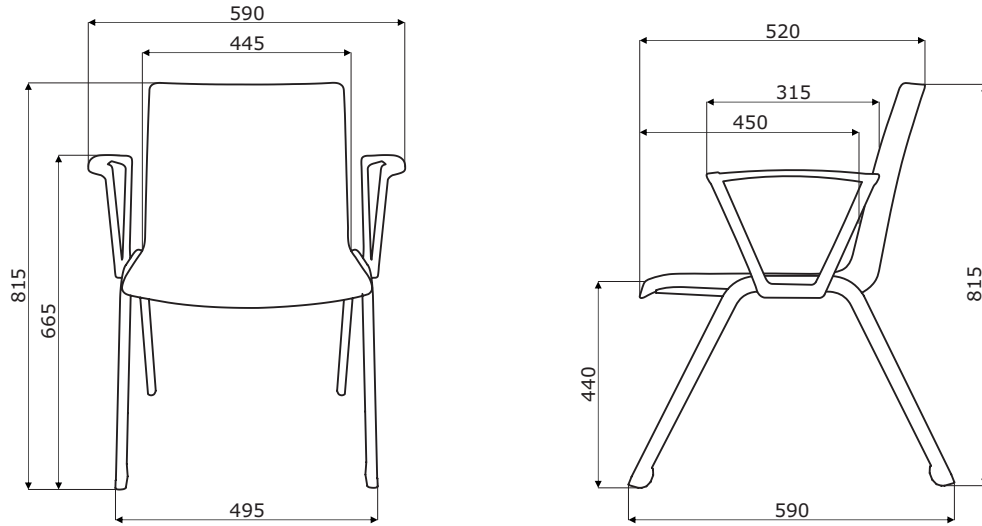

Shila - chair \*



**SHS01**  
590 / 580 / 825  
8 kg



**SHS01K**  
590 / 580 / 825  
8 kg



**SHS07**  
590 / 580 / 825  
8 kg



**SHS07K**  
590 / 580 / 825  
8 kg



**SHS10**  
590 / 580 / 825  
8 kg




**SHS10K**  
590 / 580 / 825  
8 kg

\* dimensions expressed in millimeters: width x depth x height

|                      |                                   |   |                 |
|----------------------|-----------------------------------|---|-----------------|
| <b>Shila - chair</b> | Date of preparation<br>16.08.2021 | The data contained in this document is valid in the day of its preparation. Change of the product, as long as it does not affect the basic features of it, does not require consistent updates of the document. | page 7/13       |
|                      |                                   |   | <b>products</b> |

## Upholstery seat pad - Fabric Nemo

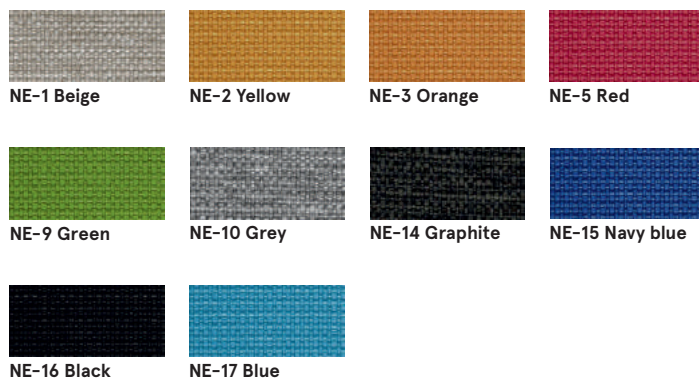

### Technical data:

|                                   |  |
|-----------------------------------|--|
| <b>Material</b>                   | polyester 100%   |
| <b>Fabric weight</b>              | 366g/m2  |
| <b>Abrasion resistance rubs</b>   | PN_EN ISO 12947 - 2:2 100,000  |
| <b>Pilling resistance</b>         | scale 1-8, max. 8, PN-EN ISO 105 - B02 (3-4)                         |
| <b>Colour fastness to light</b>   | scale 1-5, max. 5, PN-EN 1021 - 1,                                   |
| <b>Colour fastness to rubbing</b> | PN-EN 1021 - 1<br>skcale 1-5, max. 5, EN ISO 105x12<br>(wet/dry) 4-5 |

## Upholstery seat pad - Fabric Medley - second price group



### Technical data:

|                                       |  |
|---------------------------------------|--|
| <b>Material</b>                       | polyester 100%   |
| <b>Fabric weight</b>                  | 510 g/lm (16.45 oz./lin.yd.)   |
| <b>Abrasion resistance rubs</b>       | BS EN ISO 12947-2, 75,000 cykli Martindale   |
| <b>Pilling resistance</b>             | scale 1-5, max. 5, EN ISO 12945-2 (4)  |
| <b>Colour fastness to light</b>       | scale 1-8, max. 8, EN ISO 105-B02 (5-7)  |
| <b>Colour fastness to rubbing</b>     | scale 1-5, max. 5, EN ISO 105x12<br>(wet/dry (4-5/4-5))  |
| <b>Acoustic test sound absorption</b> | ISO 354  |
| <b>Flammability</b>                   | BS EN 1021-1 (cigarette)<br>BS 476 Part 7, Class 2<br>Class Uno UNI 9174 - UNI 8457<br>CA TB 117-2013<br>ASTM E 84 Class I |

## Upholstery seat pad - Fabric Atlantic \* - second price group



### Technical data:

|                                   |   |
|-----------------------------------|---|
| <b>Material</b>                   | polyester 100%  |
| <b>Fabric weight</b>              | 530 g/lm (17.09 oz./lin.yd.)  |
| <b>Abrasion resistance rubs</b>   | BS EN ISO 12947-2, 110,000 Martindale cycles  |
| <b>Pilling resistance</b>         | scale 1-5, max. 5, EN ISO 12945-2 (4-5)   |
| <b>Colour fastness to light</b>   | scale 1-8, max. 8, EN ISO 105-B02 (5-7)   |
| <b>Colour fastness to rubbing</b> | scale 1-5, max. 5, EN ISO 105x12<br>(wet/dry)   |
| <b>Flammability</b>               | CA TB 117-2013<br>ASTM E 84 Class I<br>BS EN 1021-2 (match)<br>BS EN 1021-1 (cigarette) |

\* There is a possibility of ordering the product in full colour spectrum of Atlantic range, as per Gabriel's pattern book, within 8 weeks



### Upholstery seat pad - Fabric Vita - second price group



**Technical data:**

**Material** Surface: 98,5% PVC, 1,5% PU  
Substrate: 50% poliester, 50% Cotton

**Fabric weight** 850g/m2 ± 10% (1190G/lin. m ± 10%)

**Abrasion resistance rubs** BS EN ISO 5470-2, 100,000 Martindale cycles

**Colour fastness to light** 6 (ISO 105 - B02)

**Colour fastness to rubbing** wet: 4, dry: 4 (ISO 105 - X12)

**Flammability** BS EN 1021 - (cigarette)  
BS EN 1021 - 2 (match)  
BS 5852 - (Ignition Source 5)  
BS 7176 - (Medium Hazard)

**Flexes** BS EN ISO 7854 - Method B,  
400.000 Flexing cycles

**Anti-microblal / Anti-fungal** AATCC 147

### Upholstery seat pad - Fabric Charles - second price group



**Technical data:**

**Material** 100% polyester

**Fabric weight** 433g/m2

**Abrasion resistance rubs** 90,000 Martindale cycles (EN ISO 12947-2)


**Pilling resistance** EN ISO 12945-2, 5

**Light fastness** EN ISO 105-B02, 5

**Rubbing fastness** dry: 4-5, wet: 4-5, EN ISO 105x12

**Flammability** EN 1021, 1

### Upholstery seat pad - Fabric Go Check - second price group

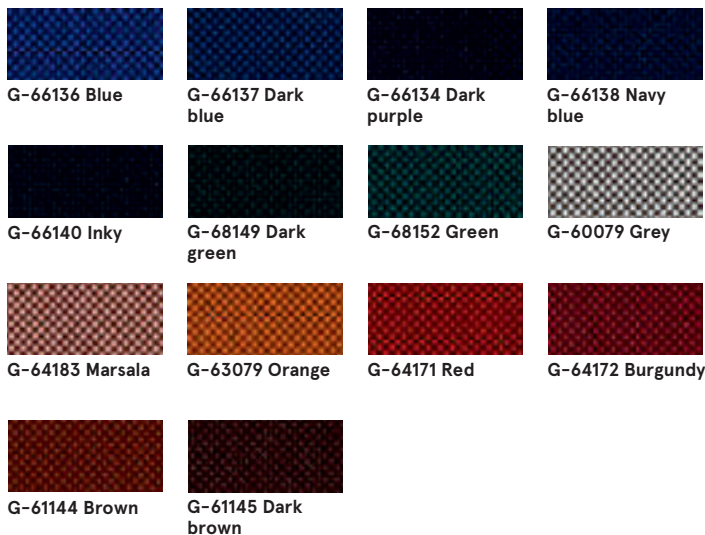

**Technical data:**

**Material** 100% Trevira CS  
**Fabric weight** 435g/lm  
**Abrasion resistance rubs** 80,000 rubs martindale (EN ISO 12947-2)  
**Pilling resistance** scale 1-5, max. 5 - EN ISO 12945-2, 5  
**Light fastness** scale 1-8, max. 8 - EN ISO 105-B02, 5-8  
**Rubbing fastness** dry: 4-5, wet: 4-5, scale 1-5, max. 5 - EN ISO 105x12  
**Flammability** BS EN 1021 1&2 Cigarette and Match  
 BS EN 1021-1 Cigarette  
 BS 5852 Crib 5  
 BS 7176 Medium hazard  
 DIN 4102 - B1  
 NFP 92-503/504/505 M1  
 ÖNORM A3800-B1-B3825-Q1 UK  
 Class Uno UNI 9175 Class 1 I EMME  
 FAR/JAR 25.853 (a) (i) (ii)  
 CA TB 117-2013  
 DIN EN 13501-1 B-s1,d0  
 AM 18 - NF D 60-013-(only for fabric)

### Upholstery seat pad - Fabric Mica - second price group



**Technical data:**

**Material** post-consumer recycled polyester 97%, polyester 3%  
**Fabric weight** 305 g/lm  
**Abrasion resistance rubs** 60,000 rubs martindale (EN ISO 12947-2)  
**Pilling resistance** scale 1-5, max. 5 - EN ISO 12945-2, 4-5  
**Light fastness** scale 1-8, max. 8 - EN ISO 105-B02, 5-8  
**Rubbing fastness** dry: 4-5, wet: 4-5, scale 1-5, max. 5 - EN ISO 105x12  
**Flammability** CA TB 117-2013  
 ASTM E 84 Class I  
 BS EN 1021-1 Cigarette  
 BS EN 1021-2 Match  
 BS 476 Part 7 class I

Upholstery seat pad - Fabric Xtreme - third price group



**Technical data:**

**Material** 100% Trevira Clame (CS)  
100% Recykling (YS)  
Flame Retardant polyester.  
Non metallic dyestuffs.

**Fabric weight** 310 g/m2 ±5% (435g/lin.m ±5%)


**Abrasion resistance rubs** 60,000 Martindale cycles (CS)  
100,000 Martindale cycles (YS)

**Colour fastness to light** 6 (ISO 105 - B02)

**Colour fastness to rubbing** wet: 4, dry: 4 (ISO 105 - X12)

**Flammability** EN 1021 - 1 (cigarette),  
EN 1021 - 2 (match)  
BS 7176 Low Hazard,  
NF P92-507 M1, DIN 4102 B1,  
UNI 9175 Class 1 IM, UNI 8456,  
UNI 9174 & UNI 9177 Classe Uno,  
ÖNORM B 3825 & A 3800-1  
NF D 60-013

Upholstery seat pad - Fabric Synergy - third price group

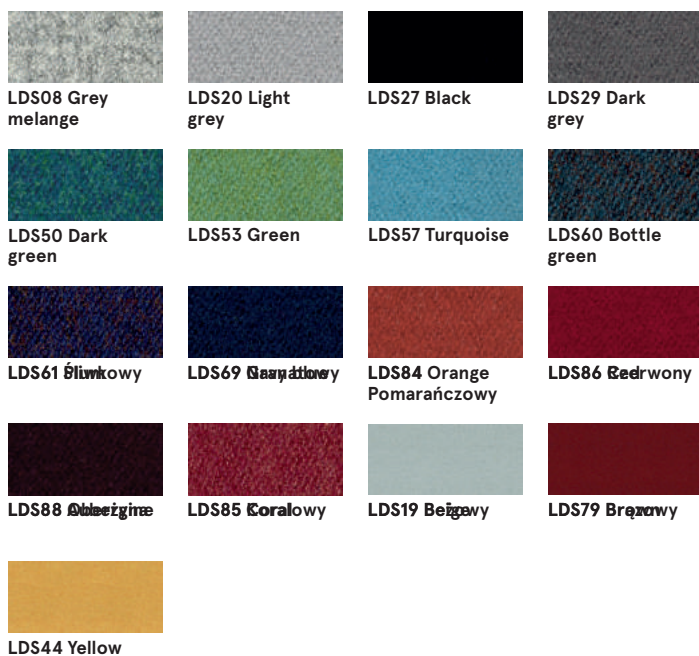

**Technical data:**

**Material** 95% Virgin Wool, 5% Poliamid

**Fabric weight** 400g/m2 ±5% (560 g/lin.m ±5%)

**Abrasion resistance rubs** Independently certified  
≥100,000 Martindale cycles

**Colour fastness to light** 5 (ISO 105 - B02)

**Colour fastness to rubbing** ISO 105 - X12 - wet: 4, dry: 4

**Flammability** EN 1021 - 1 (cigarette),  
EN 1021 - 2 (match),  
BS 7176 Low Hazard,  
UNI 9175 Classe 1 IM,  
ÖNORM B 3825 & A 3800-1


## Upholstery seat pad – Fabric Silvertex – third price group

There is a possibility of ordering the product in full colour spectrum of Silvertex range, as per Spradling’s pattern book, within 15 working days.

### Technical data:

|                              |  |
|------------------------------|--|
| <b>Material</b>              | Topcoat: 100% Vinyl<br>Backing: 100% Polyesterr Hi-Loft™   |
| <b>Fabric weight</b>         | 685 gr/m2  |
| <b>Abrasion resistance</b>   | >300,000 cycles Martindale   |
| <b>UV-resistance</b>         | >= 7 (1000 hours, blue wool scale)   |
| <b>Cold Crack resistance</b> | -23°C  |
| <b>Flame retardancy</b>      | NF P 92-503 / M2<br>EN 1021, Part 1&2<br>DIN 4102 B2<br>ÖNORM B 3825, Gruppe I – Schwerbrennbares Verhalten<br>ÖNORM A 3800, Teil I, Qualmbildungsklasse QI – schwachqualmend<br>IMO Res. MSC.307 (88) (2010 FTP Code) Annex I Part 8<br>(MED) Marine Equipment Directive in its current valid version<br>UNI 9175 (1987) / UNI 9175/FAI (1994) Classe I.IM (uno I EMME)<br>UNE 23.727-90 IR /M2<br>EN 71-2: 2006+AI: 2007 Safety of Toys – Part 2: Flammability<br>ECE R 118 (replaces Directive 95/28/EC)<br>FMVSS 302<br>FAR 25/853 |
| <b>Antimicrobial</b>         | Antifungal Protection, Antibacterial Protection, Antimycotic Protection  |

## Upholstery seat pad – Fabric Atlas – fourth price group

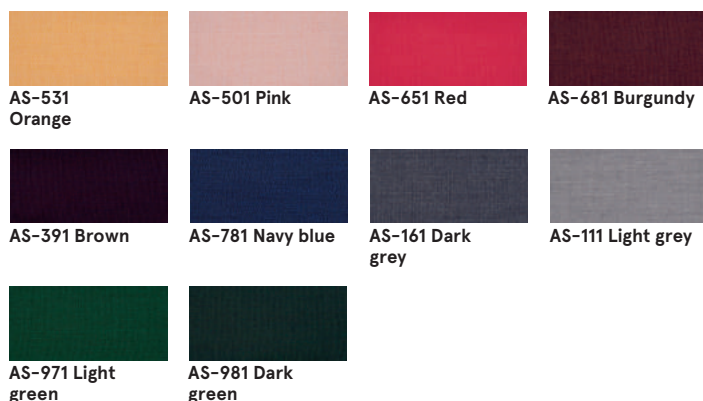

### Technical data:

|                                   |   |
|-----------------------------------|---|
| <b>Material</b>                   | 90% new wool, 10% nylon   |
| <b>Fabric weight</b>              | 286g/m2, 400g/lm  |
| <b>Abrasion resistance rubs</b>   | 100,000 cyklí Martindale, EN ISO 12947  |
| <b>Colour fastness to light</b>   | ISO 105 B02: 6-7  |
| <b>Colour fastness to rubbing</b> | ISO 105-X12:2001, (wet/dry) 4-5/4-5   |
| <b>Flammability</b>               | BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 1M, US Cal. Bull. 117-2013 |

## Upholstery seat pad – Fabric Field2 – fourth price group



### Technical data:

|                                 |   |
|---------------------------------|---|
| <b>Material</b>                 | 100% Trevira CS   |
| <b>Fabric weight</b>            | 321g/m2, 450g/lm  |
| <b>Abrasion resistance rubs</b> | 100,000 cyklí Martindale, EN ISO 12947  |
| <b>Colour fastness to light</b> | ISO 105 B02: 5-7  |
| <b>Flammability</b>             | BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, DIN 4102 B1 FAR 25.853, UNI 9177 classe 1, US Cal. Bull. 117-2013 |

**Base**



**M016 Pearl white**  
semi-matt RAL1013



**M010 Light grey**  
semi-matt RAL7044



**M011 Dark grey**  
semi-matt RAL7042



**M012 Dark green**  
semi-matt RAL6012



**M013 Burgundy**  
semi-matt RAL3007




**M014 Red**  
semi-matt RAL3016



**M115 Black**  
semi-matt RAL9005

**Base SHS10, SHS10K; armrest, writing tablet, castors**



**Black**