

# Pedestals SLD HT - Gloss technical specification



.mdd

**MDD has a leading position among manufacturers of office furniture with many awards that prove quality and continuously increase demand for its products.**

The realities of today's market require constant quality improvement at all levels of modern organization. This applies in particular to customer service, marketing, quality of products and also to quality of processes within the company. Partnership relations among employees and with business partners form a base of economic growth and success of the company.

Constant investments in innovative machinery park, optimization of management systems and an expansion of production halls allow to minimize the lead times for the product of the highest quality.

**More than twenty years of experience in office furniture industry come with reference from a long list of companies and institutions to show their appreciation for an efficient and comprehensive service.**

**MDD is highly aware of the environment.**

Being located in the forest region with lake by its side, MDD takes the nature seriously and invests constantly in a modern and energy-efficient solutions to preserve the local life. Company puts emphasis on waste segregation and recycling. MDD has been awarded for the exceptional care and involvement in waste disposal. All materials used are environmentally friendly and enjoy a high 95 % rate of being recycled.



## **General informations:**

### **Warranty:**

MDD products – **5 years.**

Electrical components and fabric – **2 years.**

### **Certificate - MFC:**



### **Assembly:**

the product comes pre-assembled

### **Packing:**

cardboard

### **Compliant with standards:**

PN-EN 14073-2:2006

### **Boards density:**


12 mm – 690 – 750 kg/m<sup>3</sup>

18 mm – 650 – 690 kg/m<sup>3</sup>

28 mm – 610 – 630 kg/m<sup>3</sup>

36 mm – 610 – 630 kg/m<sup>3</sup>


Mobile pedestal without handles

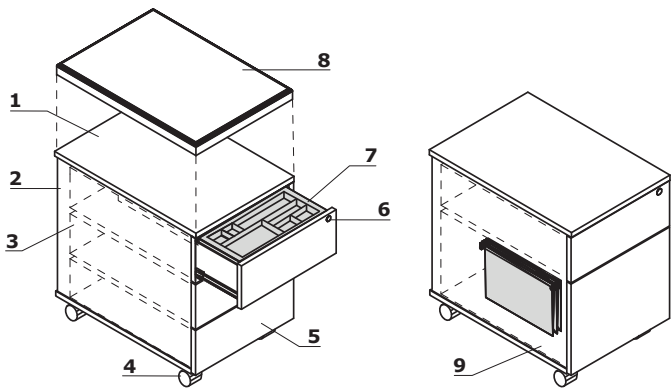


- 1. **Top** - MFC 18 mm, coated with HPL high gloss
- 2. **Body** - MFC 18 mm, ABS edge
- 3. **Metal drawer** - roll runners, max load 25 kg, 80% extraction, anti-tilt mechanism; OPTION WITH EXTRA CHARGE - ball runners, soft-closing system
- 4. **Castors** - Ø50 mm, two with brakes
- 5. **Front** - MFC 18 mm, coated with HPL high gloss, ABS edge
- 6. **Central lock** - foldable key
- 7. **Pencil tray** - plastic, colour: black
- 8. **Optional cushion SKP13** - for pedstal, max load 120 kg, ordered separately
- 9. **Suspension files drawer** - ball runners, max load 30 kg, 100% extractionn, A4 folders must be inserted parallely to the front

ATTENTION - sitting on the pedestal possible only after mounting the cushion (SKP13); the pedestal with cushion is intended for sitting only  
- moving the pedestal while sitting may result in damaging the castors

Mobile pedestals without handles with HPL top and front \*




**SLD12HT**  
416 / 600 / 587  
23 kg



**SLD13HT**  
416 / 600 / 587  
23 kg

Pedestal cushion \*



**SKP13**  
400 / 600 / 52  
3 kg

\* dimensions expressed in millimeters: width x depth x height

## Top, base, body



67 White pastel



08 Black



26 Aluminum  
satinato



154 Anthracite



## Front



73 White high  
gloss



101 Black high  
gloss




148 Grey high  
gloss



155 Anthracite  
high gloss

## SKP13


### Fabric Nemo



NE-1 Beige



NE-2 Yellow



NE-3 Orange




NE-5 Red



NE-9 Green



NE-10 Grey



NE-14 Graphite



NE-15 Navy blue



NE-16 Black



NE-17 Blue

#### Technical data:

|                                   |                                                   |
|-----------------------------------|---------------------------------------------------|
| <b>Material</b>                   | polyester 100%                                    |
| <b>Fabric weight</b>              | 366g/m <sup>2</sup>                               |
| <b>Abrasion resistance rubs</b>   | PN-EN ISO 12947 - 2:2 100,000                     |
| <b>Pilling resistance</b>         | scale 1-8, max. 8, PN-EN ISO 105 - B02 (3-4)      |
| <b>Colour fastness to rubbing</b> | scale 1-5, max. 5, PN-EN 1021 - 2, PN-EN 1021 - 1 |
| <b>Colour fastness to rubbing</b> | scale 1-5, max. 5, EN ISO 105x12 (wet/dry) 4-5    |

### Fabric Runner - second price group



R-63034 Orange



R-64089 Red



R-66063 Blue



R-60011 Grey



R-68056 Green



R-66064 Navy  
Blue



R-60999 Black



R-60025  
Graphite



R-61128 Beige



R-61130 Brown

#### Technical data:

|                                       |                                                                                                  |
|---------------------------------------|--------------------------------------------------------------------------------------------------|
| <b>Material</b>                       | polyester 100%                                                                                   |
| <b>Fabric weight</b>                  | 510 g/lm (16.45 oz./lin.yd.)                                                                     |
| <b>Abrasion resistance rubs</b>       | BS EN ISO 12947-2<br>70,000 Martindale cycles                                                    |
| <b>Pilling resistance</b>             | scale 1-5, max 5, EN ISO 12945-2 (4-5)                                                           |
| <b>Colour fastness to light</b>       | scale 1-8, max 8, EN ISO 105-B02 (5-7)                                                           |
| <b>Colour fastness to rubbing</b>     | scale 1-5, max 5, EN ISO 105x12 (wet/dry) 4-5                                                    |
| <b>Acoustic test sound absorption</b> | ISO 354                                                                                          |
| <b>Flammability</b>                   | BS EN 1021-2 Match,<br>CA TB 117-2013, BS EN 1021-1 (cigarette) Class Uno UNI 9175 Class 2, EMME |

## Fabric Medley – second group



### Technical data:

|                                       |                                                                                                                            |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>                       | polyester 100%                                                                                                             |
| <b>Fabric weight</b>                  | 510 g/lm (16.45 oz/lin.yd.)                                                                                                |
| <b>Abrasion resistance rubs</b>       | BS EN ISO 12947-2, 75,000 cykli Martindale                                                                                 |
| <b>Pilling resistance</b>             | scale 1-5, max. 5, EN ISO 12945-2 (4)                                                                                      |
| <b>Colour fastness to light</b>       | scale 1-8, max. 8, EN ISO 105-B02 (5-7)                                                                                    |
| <b>Colour fastness to rubbing</b>     | scale 1-5, max. 5, EN ISO 105x12 (wet/dry (4-5/4-5))                                                                       |
| <b>Acoustic test sound absorption</b> | ISO 354                                                                                                                    |
| <b>Flammability</b>                   | BS EN 1021-1 (cigarette)<br>BS 476 Part 7, Class 2<br>Class Uno UNI 9174 – UNI 8457<br>CA TB 117-2013<br>ASTM E 84 Class I |

## Fabric Atlantic \* – second price group



### Technical data:

|                                   |                                                                                          |
|-----------------------------------|------------------------------------------------------------------------------------------|
| <b>Material</b>                   | polyester 100%                                                                           |
| <b>Fabric weight</b>              | 530 g/lm (17.09 oz/lin.yd.)                                                              |
| <b>Abrasion resistance rubs</b>   | BS EN ISO 12947-2, 110,000 Martindale cycles                                             |
| <b>Pilling resistance</b>         | scale 1-5, max. 5, EN ISO 12945-2 (4-5)                                                  |
| <b>Colour fastness to light</b>   | scale 1-8, max. 8, EN ISO 105-B02 (5-7)                                                  |
| <b>Colour fastness to rubbing</b> | scale 1-5, max. 5, EN ISO 105x12 (wet/dry (4-5/4-5))                                     |
| <b>Flammability</b>               | CA TB 117-2013<br>ASTM E 84 Class I<br>BS EN 1021-2 (zapałka)<br>BS EN 1021-1 (papieros) |

## Fabric River – second group



### Technical data:

|                                   |                                                                                                            |
|-----------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Material</b>                   | polyester 100%                                                                                             |
| <b>Fabric weight</b>              | 300g/m2 (+/- 5%)                                                                                           |
| <b>Abrasion resistance rubs</b>   | 100,000 Martindale cycles (EN ISO 12947-1,2)                                                               |
| <b>Pilling resistance</b>         | EN ISO 12945-2 (5)                                                                                         |
| <b>Colour fastness to light</b>   | 4 (EN ISO 105-B02)                                                                                         |
| <b>Colour fastness to rubbing</b> | dry: 4-5, wet: 3 (EN ISO 105-x12)                                                                          |
| <b>Flammability</b>               | BS 5852: Part 1, Ignition Source 0 (cigarette)<br>BS 5852: Part 1, Ignition Source 1 (match)<br>EN1021 – 2 |

\* There is a possibility of ordering the product in full colour spectrum of Atlantic range, as per Gabriel's pattern book, within 8 weeks




## Fabric Xtreme – third price group



### Technical data:

|                                   |                                                                                                                                                                                                                      |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>                   | 100% Trevira Clame (CS)<br>100% Recykling (YS)<br>Flame Retardant polyester.<br>Non metallic dyestuffs.                                                                                                              |
| <b>Fabric weight</b>              | 310 g/m2 ±5% (435g/lin.m ±5%)                                                                                                                                                                                        |
| <b>Abrasion resistance rubs</b>   | 60,000 Martindale cycles (CS)<br>100,000 Martindale cycles (YS)                                                                                                                                                      |
| <b>Colour fastness to light</b>   | 6 (ISO 105 – B02)                                                                                                                                                                                                    |
| <b>Colour fastness to rubbing</b> | wet: 4, dry: 4 (ISO 105 – X12)                                                                                                                                                                                       |
| <b>Flammability</b>               | EN 1021 – 1 (cigarette),<br>EN 1021 – 2 (match)<br>BS 7176 Low Hazard,<br>NF P92-507 M1, DIN 4102 B1,<br>UNI 9175 Class 1 IM, UNI 8456,<br>UNI 9174 & UNI 9177 Classe Uno,<br>ÖNORM B 3825 & A 3800-1<br>NF D 60-013 |

## Fabric Synergy – third price group

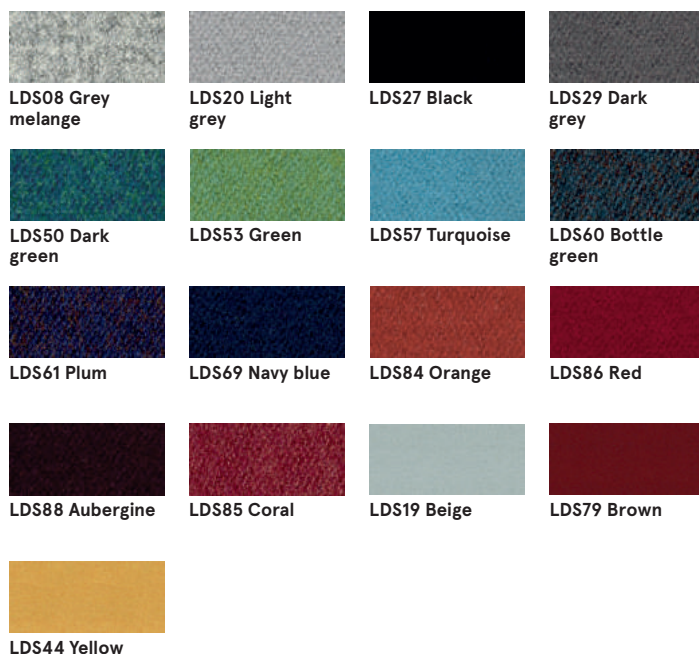

### Technical data:

|                                   |                                                                                                                             |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>                   | 95% Virgin Wool , 5% Poliamid                                                                                               |
| <b>Fabric weight</b>              | 400g/m2 ±5% (560 g/lin.m ±5%)                                                                                               |
| <b>Abrasion resistance rubs</b>   | Independently certified<br>≥100,000 Martindale cycles                                                                       |
| <b>Colour fastness to light</b>   | 5 (ISO 105 – B02)                                                                                                           |
| <b>Colour fastness to rubbing</b> | ISO 105 – X12 – wet: 4, dry: 4                                                                                              |
| <b>Flammability</b>               | EN 1021 – 1 (cigarette),<br>EN 1021 – 2 (match),<br>BS 7176 Low Hazard,<br>UNI 9175 Classe 1 IM,<br>ÖNORM B 3825 & A 3800-1 |

## Fabric Atlas – fourth price group



### Technical data:

|                                   |                                                                                                                                                                     |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>                   | 90% new wool, 10% nylon                                                                                                                                             |
| <b>Fabric weight</b>              | 286g/m2, 400g/lm                                                                                                                                                    |
| <b>Abrasion resistance rubs</b>   | 100,000 cykli Martindale, EN ISO 12947                                                                                                                              |
| <b>Colour fastness to light</b>   | ISO 105 B02: 6-7                                                                                                                                                    |
| <b>Colour fastness to rubbing</b> | ISO 105-X12:2001, (wet/dry) 4-5/4-5                                                                                                                                 |
| <b>Flammability</b>               | BS EN 1021-2 Match, BS EN 1021-1 Cigarette,<br>BS 5 5852 Crib 5, BS 5852 ignition source 3,<br>BS 5852 Part 1, NF D 60 013, UNI 9175 1IM,<br>US Cal. Bull. 117-2013 |


## Fabric Field2 – fourth price group




FD-463 Yellow



FD-963 Green



FD-123 Beige



FD-132 Grey



FD-142 Graphite



FD-662 Red



FD-673 Blue-red



FD-782 Navy blue



FD-693 Burgundy



FD-192 Black

### Technical data:

|                                 |                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>Material</b>                 | 100% Trevira CS                                                                                                                       |
| <b>Fabric weight</b>            | 321g/m <sup>2</sup> , 450g/lm                                                                                                         |
| <b>Abrasion resistance rubs</b> | 100,000 cykli Martindale, EN ISO 12947                                                                                                |
| <b>Colour fastness to light</b> | ISO 105 B02: 5-7                                                                                                                      |
| <b>Flammability</b>             | BS EN 1021-2 Match, BS EN 1021-1 Cigarette,<br>BS 5 5852 Crib 5, DIN 4102 B1 FAR 25.853,<br>UNI 9177 classe 1, US Cal. Bull. 117-2013 |