

# Pedestals KDT, KD technical specification



.mdd

**MDD has a leading position among manufacturers of office furniture with many awards that prove quality and continuously increase demand for its products.**

The realities of today's market require constant quality improvement at all levels of modern organization. This applies in particular to customer service, marketing, quality of products and also to quality of processes within the company.

Partnership relations among employees and with business partners form a base of economic growth and success of the company.

Constant investments in innovative machinery park, optimization of management systems and an expansion of production halls allow to minimize the lead times for the product of the highest quality.

**More than twenty years of experience in office furniture industry come with reference from a long list of companies and institutions to show their appreciation for an efficient and comprehensive service.**

**MDD is highly aware of the environment.**

Being located in the forest region with lake by its side, MDD takes the nature seriously and invests constantly in a modern and energy-efficient solutions to preserve the local life. Company puts emphasis on waste segregation and recycling. MDD has been awarded for the exceptional care and involvement in waste disposal. All materials used are environmentally friendly and enjoy a high 95 % rate of being recycled.



## General informations:

### **Warranty:**

MDD products - **5 years.**

Electrical components and fabric - **2 years.**

### **Certificate - MFC:**



### **Assembly:**

the product comes pre-assembled

### **Packing:**

cartboard

### **Compliant with standards:**

PN-EN 14073-2:2006

### **Boards density:**


12 mm - 690 - 750 kg/m<sup>3</sup>

18 mm - 650 - 690 kg/m<sup>3</sup>

28 mm - 610 - 630 kg/m<sup>3</sup>

36 mm - 610 - 630 kg/m<sup>3</sup>


## Mobile pedestals - Standard

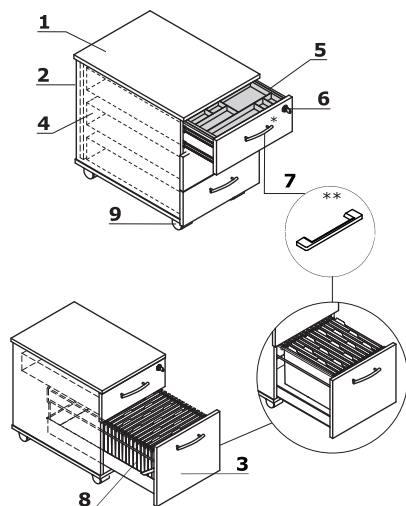


1. **Top** - MFC 18 mm, ABS edge
2. **Body** - MFC 18 mm, ABS edge
3. **Front** - MFC 18 mm, ABS edge
4. **Metal drawer** - roll runners, max load 25 kg, 80% extraction, anti-tilt mechanism; OPTION WITH EXTRA CHARGE - ball runners, soft-closing system
5. **Pencil tray** - plastic, colour: black
6. **Central lock** - foldable key
7. **Aluminum handle**:  
\* Standard  
\*\* OPTION WITH EXTRA CHARGE - handle Pro
8. **Suspension files drawer** - ball runners, max load 30 kg, 100% extraction, A4 folders can be situated parallelly and perpendicularly to the front
9. **Castors** - Ø50 mm, two with brakes

ATTENTION - sitting on the pedestal possible only after mounting the cushion (SKP13); the pedestal with cushion is intended for sitting only  
- moving the pedestal while sitting may result in damaging the castors


## Stationary pedestals - Standard

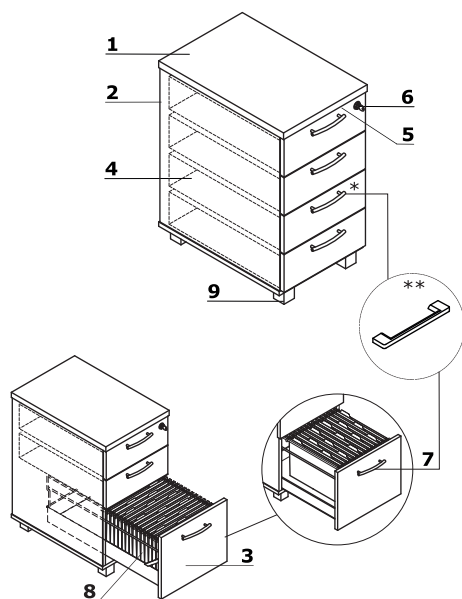

1. **Top** - MFC 28 mm, ABS edge
2. **Body** - MFC 18 mm, ABS edge
3. **Front** - MFC 18 mm, ABS edge
4. **Metal drawer** - roll runners, max load 25 kg, 80% extraction, anti-tilt mechanism; OPTION WITH EXTRA CHARGE - ball runners, soft-closing system
5. **Pencil tray** - plastic, colour: black
6. **Central lock** - foldable key
7. **Aluminum handle**:  
\* Standard  
\*\* OPTION WITH EXTRA CHARGE - handle Pro
8. **Suspension files drawer** - ball runners, max load 30 kg, 100% extraction, A4 folders can be situated parallelly and perpendicularly to the front
9. **Leveling** - 10 mm range

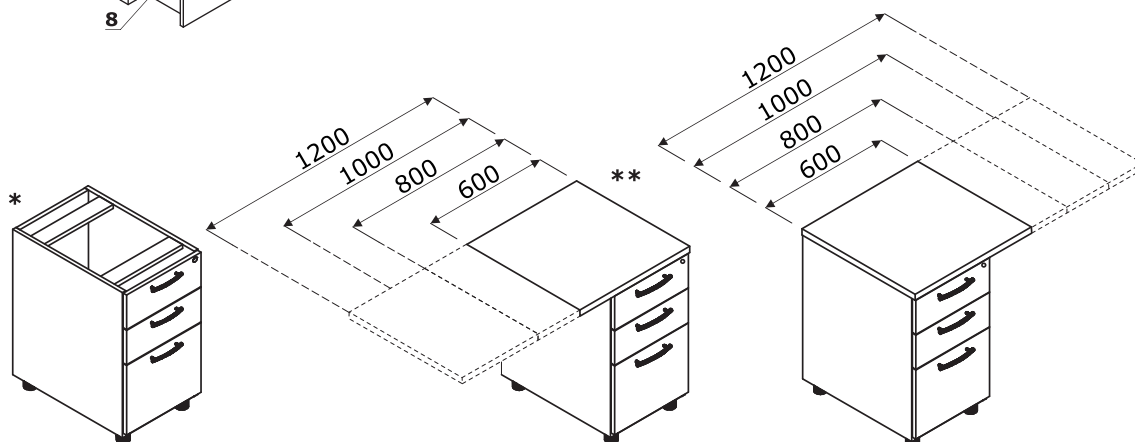


Stationary pedestals - Yan

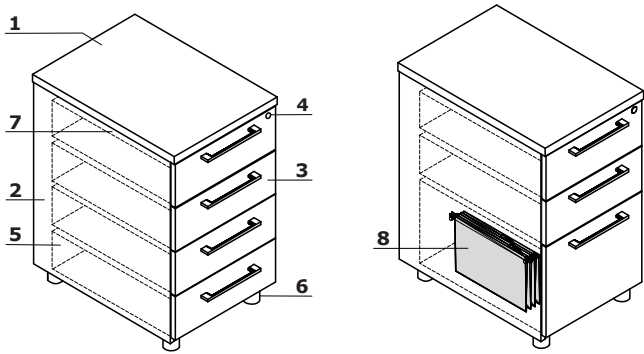


- 1. **Top** - MFC 28 mm, ABS edge
- 2. **Body** - MFC 18 mm, ABS edge
- 3. **Front** - MFC 18 mm, ABS edge
- 4. **Central lock** - foldable key
- 5. **Metal drawer** - roll runners, max load 25 kg, 80% extraction, anti-tilt mechanism; OPTION WITH EXTRA CHARGE - ball runners, soft-closing system
- 6. **Leveling** - 10 mm range
- 7. **Pencil tray** - plastic, colour: black
- 8. **Suspension files drawer** - ball runners, max load 30 kg, 100% extraction, A4 folders can be situated parallelly and perpendicularly to the front


KDT..L



KDT..P



KDT..LP

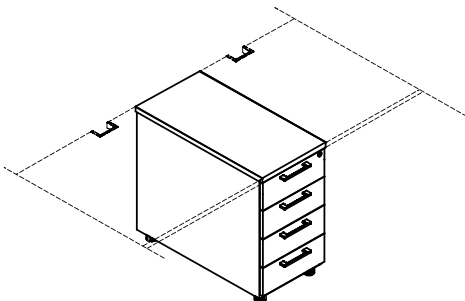

## Mobile pedestals - Standard \*




**KDT12**  
402 / 600 / 586  
30 kg



**KDT120**  
402 / 800 / 586  
33 kg




**KDT13**  
402 / 600 / 586  
23 kg




**KDT130**  
402 / 800 / 586  
28 kg

## Stationary pedestals - Standard \*




**KDT63**  
402 / 600 / 740  
27 kg



**KDT73**  
402 / 800 / 740  
32 kg




**KDT64**  
402 / 600 / 740  
28 kg




**KDT74**  
402 / 800 / 740  
31 kg


## Stationary pedestals - Yan




**KDT73P**  
402 / 800 / 740  
32 kg




**KDT73L**  
402 / 800 / 740  
32 kg




**KDT73LP**  
402 / 800 / 740  
33 kg



**KDT74P**  
402 / 800 / 740  
32 kg



**KDT74L**  
402 / 800 / 740  
32 kg



**KDT74LP**  
402 / 800 / 740  
33 kg

\* dimensions expressed in millimeters: width x depth x height

## Pedestals without tops - Standard \*




**KDT063**  
400 / 600 / 712  
25 kg



**KDT073**  
400 / 800 / 712  
25 kg



**KDT064**  
400 / 600 / 712  
25 kg



**KDT074**  
400 / 800 / 712  
28 kg

## Pedestals with top o verhang - Standard \*




**KD663**  
600 / 600 / 740  
32 kg




**KD673**  
600 / 800 / 740  
34 kg




**KD664**  
600 / 600 / 740  
232 kg




**KD674**  
600 / 800 / 740  
37 kg




**KD863**  
800 / 600 / 740  
34 kg




**KD873**  
800 / 800 / 740  
36.9 kg




**KD867**  
800 / 600 / 740  
234 kg




**KD874**  
800 / 800 / 740  
39.9 kg




**KD1063**  
1000 / 600 / 740  
35.9 kg



**KD1073**  
1000 / 800 / 740  
39.9 kg




**KD1064**  
1000 / 600 / 740  
35.9 kg




**KD1074**  
1000 / 800 / 740  
42.9 kg

\* dimensions expressed in millimeters: width x depth x height


## Pedestals with top overhang - Standard \*




**KD1263**  
1200 / 600 / 740  
38.4 kg



**KD1273**  
1200 / 800 / 740  
42.9 kg




**KD1264**  
1200 / 600 / 740  
38.4 kg




**KD1274**  
1200 / 800 / 740  
45.9 kg

## Pedestal cushion




**SKP13**  
400 / 600 / 52  
3 kg


## Desktop storage \*



**A1L02**  
800 / 402 / 389  
18 kg




**A1L04P**  
800 / 402 / 389  
19 kg



**A1L04L**  
800 / 402 / 389  
19 kg

## Upholstered panel for cabinets A1L02, A1L04P i A1L04L \*



**PA1L**  
761 / 341 / 22  
5 kg


\* dimensions expressed in millimeters: width x depth x height

Pedestals KDT, KD	Date of preparation 25.09.2020	The data contained in this document is valid in the day of its preparation. Change of the product, as long as it does not affect the basic features of it, does not require consistent updates of the document.	page 7/11
			products

## Top, body, base, front



## SKP13, PA1L Fabric Nemo

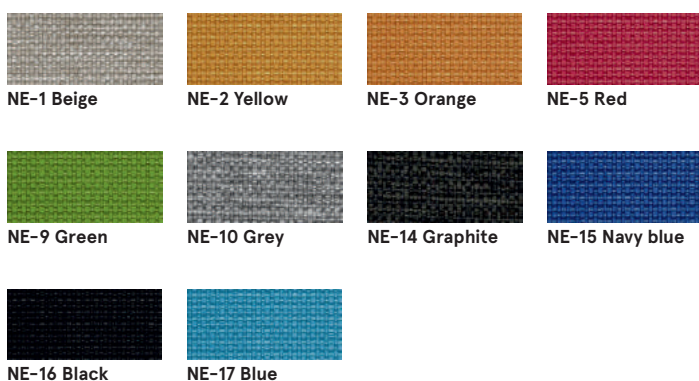

### Technical data:

<b>Material</b>	polyester 100%
<b>Fabric weight</b>	366g/m2
<b>Abrasion resistance rubs</b>	PN_EN ISO 12947 - 2:2 100,000
<b>Pilling resistance</b>	scale 1-8, max. 8, PN-EN ISO 105 - B02 (3-4)
<b>Colour fastness to light</b>	scale 1-5, max. 5, PN-EN 1021 - 2,
<b>Colour fastness to rubbing</b>	PN-EN 1021 - 1
	skscale 1-5, max. 5, EN ISO 105x12
	(wet/dry) 4-5

## Fabric Runner - second price group



### Technical data:

<b>Material</b>	polyester 100%
<b>Fabric weight</b>	510 g/lm (16.45 oz/lin.yd.)
<b>Abrasion resistance rubs</b>	BS EN ISO 12947-2
	70,000 Martindale cycles
<b>Pilling resistance</b>	scale 1-5, max 5, EN ISO 12945-2 (4-5)
<b>Colour fastness to light</b>	scale 1-8, max 8, EN ISO 105-B02 (5-7)
<b>Colour fastness to rubbing</b>	scale 1-5, max 5, EN ISO 105x12
	(wet/dry) 4-5
<b>Acoustic test sound absorption</b>	ISO 354
<b>Flammability</b>	BS EN 1021-2 Match,
	CA TB 117-2013, BS EN 1021-1
	(cigarette) Class Uno UNI 9175 Class 2,
	EMME

\* body, base - II group



## Fabric Medley – second group



### Technical data:

<b>Material</b>	polyester 100%
<b>Fabric weight</b>	510 g/lm (16.45 oz/lin.yd.)
<b>Abrasion resistance rubs</b>	BS EN ISO 12947-2, 75,000 cykli Martindale
<b>Pilling resistance</b>	scale 1-5, max. 5, EN ISO 12945-2 (4)
<b>Colour fastness to light</b>	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
<b>Colour fastness to rubbing</b>	scale 1-5, max. 5, EN ISO 105x12 (wet/dry (4-5/4-5))
<b>Acoustic test sound absorption</b>	ISO 354
<b>Flammability</b>	BS EN 1021-1 (cigarette) BS 476 Part 7, Class 2 Class Uno UNI 9174 - UNI 8457 CA TB 117-2013 ASTM E 84 Class I

## Fabric Atlantic \* – second price group



### Technical data:

<b>Material</b>	polyester 100%
<b>Fabric weight</b>	530 g/lm (17.09 oz/lin.yd.)
<b>Abrasion resistance rubs</b>	BS EN ISO 12947-2, 110,000 Martindale cycles
<b>Pilling resistance</b>	scale 1-5, max. 5, EN ISO 12945-2 (4-5)
<b>Colour fastness to light</b>	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
<b>Colour fastness to rubbing</b>	scale 1-5, max. 5, EN ISO 105x12 (wet/dry)
<b>Flammability</b>	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-2 (match) BS EN 1021-1 (cigarette)

## Fabric River – second group



### Technical data:

<b>Material</b>	polyester 100%
<b>Fabric weight</b>	300g/m2 (+/- 5%)
<b>Abrasion resistance rubs</b>	100,000 Martindale cycles (EN ISO 12947-1,2)
<b>Pilling resistance</b>	EN ISO 12945-2 (5)
<b>Colour fastness to light</b>	4 (EN ISO 105-B02)
<b>Colour fastness to rubbing</b>	dry: 4-5, wet: 3 (EN ISO 105-x12)
<b>Flammability</b>	BS 5852: Part 1, Ignition Source 0 (cigarette) BS 5852: Part 1, Ignition Source 1 (match) En1021 – 2

\* There is a possibility of ordering the product in full colour spectrum of Atlantic range, as per Gabriel's pattern book, within 8 weeks

## Fabric Xtreme – third price group



### Technical data:

<b>Material</b>	100% Trevira Clame (CS) 100% Recykling (YS) Flame Retardant polyester. Non metallic dyestuffs.
<b>Fabric weight</b>	310 g/m2 ±5% (435g/lin.m ±5%)
<b>Abrasion resistance rubs</b>	60,000 Martindale cycles (CS) 100,000 Martindale cycles (YS)
<b>Colour fastness to light</b>	6 (ISO 105 – B02)
<b>Colour fastness to rubbing</b>	wet: 4, dry: 4 (ISO 105 – X12)
<b>Flammability</b>	EN 1021 – 1 (cigarette), EN 1021 – 2 (match) BS 7176 Low Hazard, NF P92–507 M1, DIN 4102 B1, UNI 9175 Class 1 IM, UNI 8456, UNI 9174 & UNI 9177 Classe Uno, ÖNORM B 3825 & A 3800-1 NF D 60-013

## Fabric Synergy – third price group



### Technical data:

<b>Material</b>	95% Virgin Wool, 5% Poliamid
<b>Fabric weight</b>	400g/m2 ±5% (560 g/lin.m ±5%)
<b>Abrasion resistance rubs</b>	Independently certified ≥100,000 Martindale cycles
<b>Colour fastness to light</b>	5 (ISO 105 – B02)
<b>Colour fastness to rubbing</b>	ISO 105 – X12 – wet: 4, dry: 4
<b>Flammability</b>	EN 1021 – 1 (cigarette), EN 1021 – 2 (match), BS 7176 Low Hazard, UNI 9175 Classe 1 IM, ÖNORM B 3825 & A 3800-1

## Fabric Atlas – fourth price group



### Technical data:

<b>Material</b>	90% new wool, 10% nylon
<b>Fabric weight</b>	286g/m2, 400g/1m
<b>Abrasion resistance rubs</b>	100,000 cykli Martindale, EN ISO 12947
<b>Colour fastness to light</b>	ISO 105 B02: 6-7
<b>Colour fastness to rubbing</b>	ISO 105-X12:2001, (wet/dry) 4-5/4-5
<b>Flammability</b>	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013

## Fabric Field2 – fourth price group




FD-463 Yellow



FD-963 Green



FD-123 Beige



FD-132 Grey



FD-142 Graphite



FD-662 Red



FD-673 Blue-red



FD-782 Navy blue



FD-693 Burgundy



FD-192 Black

### Technical data:

<b>Material</b>	100% Trevira CS
<b>Fabric weight</b>	321g/m <sup>2</sup> , 450g/lm
<b>Abrasion resistance rubs</b>	100,000 cykli Martindale, EN ISO 12947
<b>Colour fastness to light</b>	ISO 105 B02: 5-7
<b>Flammability</b>	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, DIN 4102 B1 FAR 25.853, UNI 9177 classe 1, US Cal. Bull. 117-2013